

MCPIR-3000

Fully Supervised PowerCode Wireless PIR Detector



Visonic®

Installation Instructions

1. INTRODUCTION

The MCPIR-3000 is an advanced, fully supervised ultra low-current wireless PIR that incorporates a PowerCode transmitter. Both transmitter and detector circuits are powered by an on-board, long life 3.6 V Lithium battery.

Each MCPIR-3000 unit has a 24-bit ID code, randomly selected in the factory from over 16 million possible combinations. This code is therefore unique and virtually impossible to reproduce. Compatible PowerCode receivers are designed to "learn" specific IDs and respond only to them.

Following detection, the MCPIR-3000 triggers the on-board transmitter which transmits its specific PowerCode ID followed by an alarm signal and status designators for tampering and battery condition. Alarm and other data are thus forwarded to the alarm control panel or to a head-end computer, depending on the type of system in which the detector is used.

Since messages transmitted by the MCPIR-3000 might collide with messages transmitted by other PowerCode transmitters, a "smart" anti-collision transmission sequence is used.

A periodic supervision message, distinguished by a specific marker, is transmitted automatically once in 60 min. (USA) or 15 min. (Europe) or according to local standards. The receiver is thus informed that the particular detector is taking an active part in the wireless network.

After triggering the transmitter, the MCPIR-3000 disarms itself to save battery power. The detector rearms itself automatically (reverts to the ready state) 2 minutes after the last movement has been detected. An LED/ WALK-TEST jumper is used to override the 2-minute rearm timer during walk testing.

A programmable pulse counter is included in the unit for maximum immunity against false alarms.




Figure 1. General View

2. SPECIFICATIONS

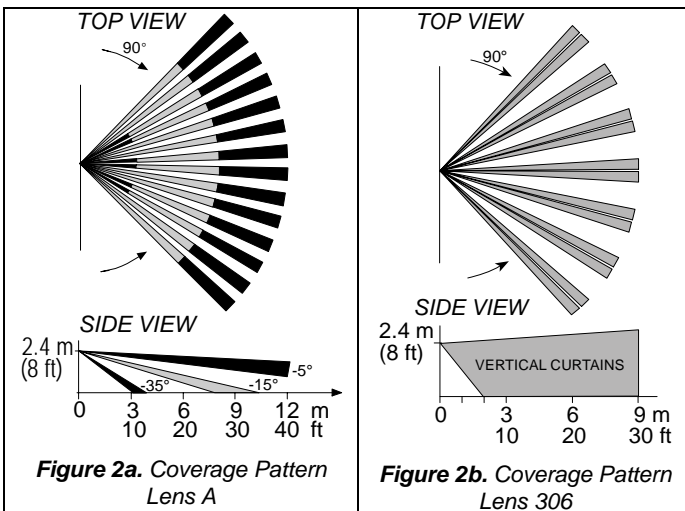


Figure 2a. Coverage Pattern
Lens A

Figure 2b. Coverage Pattern
Lens 306

OPTICAL

Lens A Data

- No. of Beams:** 34
- Field of View:** 90°
- Max. Coverage:** 12 x 12 m (40 x 40 ft)

Lens 306 Data (Optional)

- Lens type:** Cylindrical
- No. of Beams:** 14
- Max. Coverage:** 9 x 9 m (30 x 30 ft)

Vertical Adjustment:

+2° to -12°.

ELECTRICAL

Battery Type: 3.6 Volt lithium thionyl chloride (LiSOCl₂) battery, size 1/2AA, Tadiran TL-2150.

Nominal Battery Capacity: 1.2 Ah

Standby Current Drain: 0.015 mA.

Transmit Current Drain: 12 mA (including LED)

Battery Life Expectancy: 3 years (for typical use)

LED: Lights for 2 seconds upon transmission and upon motion detection in the walk test mode.

Detector: Dual-element low-noise pyroelectric sensor.

Pulse Counter: Programmable to 1, 3 or 5 pulses.

Rearm Timer: 2 minutes after the last alarm; timer disabled in the walk test mode.

WIRELESS

Frequency (MHz): 315, 433.92, 868.95, 869.2625 or other frequencies according to local requirements.

Transmission Sequence: 3 data bursts at variable intervals within 3 seconds.

Encoding: 24-bit factory selected ID code, over 16 million possible combinations.

Message Length: 36 bits

Battery Supervision: Automatic reporting of low-battery status with each alarm and with periodic autotest.

Tamper Alert: Reported at 3-minute intervals, until the tamper switch is restored.

ENVIRONMENTAL

Operating Temperature: -10° to 50°C (14° to 122°F).

Storage Temperature: -20° to 60°C (-4°F to 140°F).

RFI Protection: > 20 V/m up to 1000 MHz.

PHYSICAL

Weight: 71g (2.5 oz).

Dimensions (H x W x D): 104 x 60 x 32 mm (2.4 x 4.1 x 1.3 in.)

Color: White.

Compliance with Standards: FCC Part 15, MPT1349, Directive 1999/5/EC and EN 50131-1 Grade 1 Class II

OPTIONAL MOUNTING ACCESSORIES

BR-1: Swivel bracket for wall mounting.

BR-2: BR-1 + corner mounting adapter.

BR-3: BR-1 + ceiling mounting adapter.

3. INSTALLATION

Since this is a PowerCode-type transmitter, it is recommended to power it up and let the target receiver “learn” the transmitter’s ID before actual installation.

3.1 Battery Insertion

- Insert the battery into the battery clip - observe polarity (see Figure 3).
- Press the tamper switch lever once and release it. This will perform the reset necessary for smooth power up.
- Put the cover on and watch the LED. It will flash once in 2 seconds for at least 15 seconds until the sensor stabilizes.

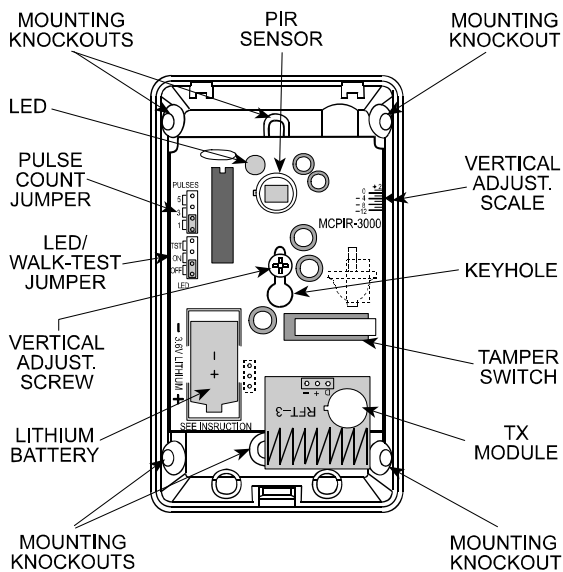


Figure 3. Components Layout

3.2 Registration of the Transmitter ID in the Target Receiver’s Memory

Refer to the target receiver’s installation instructions and follow the procedure given there for “teaching” transmitter IDs. It is much easier to carry out this operation in close proximity to the receiver.

3.3 Selecting the Mounting Location

The MCPIR-3000 can be mounted directly onto the wall (surface mounted), or in a corner, using the mounting knockouts. Always mount the unit on a firm and stable surface. Optional swivel brackets permit greater flexibility when adjusting the coverage area (Para. 3.8).

- Select the mounting location so that an intruder’s motion will cross the beams of the selected pattern.
- Determine the convenient mounting height.

NOTE: Take into account that installations at increased heights result in larger blind areas near the detector.
- To minimize false alarms, avoid aiming the detector at heaters, sources of bright light, or windows subjected to direct sunlight.
- The PIR detector senses the difference between the infrared energy transmitted by a moving body and the background temperature. It is therefore recommended that the PIR be aimed toward the coolest place in the protected area, in order to obtain the maximum sensitivity in installations where high background temperatures are expected.

3.4 Direct Mounting

- Loosen and remove the screw at the bottom of the case (see Figure 1) and then take the cover off.
- Punch out the appropriate mounting knockouts in the base.

Note: For wall surface mounting, use the two elongated knockouts at the middle of the base. For corner mounting, use

two diagonally opposite knockouts at the angled sides of the base (see Figure 3).

- Loosen the vertical adjustment screw, slide the printed circuit board upward and remove it via the “keyhole”.
- Use the base as a template for marking the drilling points.
- Drill mounting holes and insert masonry anchors if required.
- Mount the base in place using two screws.
- Remount the PC board and secure it with the vertical adjustment screw.

3.5 Adjusting the Coverage Area

The vertical scale adjustment (printed on the right edge of the p.c. board) and the plastic pointer on the base indicate (in degrees) the vertical angle between the upper layer of the coverage pattern and the horizontal line of the unit.

Table 1. Vertical Adjusting Scale

Mounting Height	Coverage Range									
	ft ⇒	7	10	13	17	20	23	26	30	40
↓	m	2	3	4	5	6	7	8	9	12
3	1	0°	0°	0°	0°	0°	0°	0°	0°	0°
4	1.2	-8°	-6°	-5°	-4°	-3°	-2°	-2°	-2°	-1°
5	1.5	-	-12°	-9°	-7°	-6°	-5°	-5°	-4°	-3°
6	1.8	-	-	-	-11°	-9°	-8°	-7°	-6°	-5°
7	2	-	-	-	-	-12°	-10°	-9°	-8°	-6°
8	2.5	-	-	-	-	-	-	-11°	-10°	-7°

The scale enables pattern adjustment from +2° to -12°, according to the installation height and the required coverage range. To change the vertical pattern adjustment, loosen the screw to slide the PC board to the desired angle and tighten the screw firmly.

3.6 Setting the Pulse Counter

MCPIR-3000 detectors are equipped with a programmable pulse counter which can be set to count 1, 3 or 5 pulses, before activating the wireless transmitter. Place the pulse count jumper at the desired setting (1, 3 or 5 - see Figure 4).

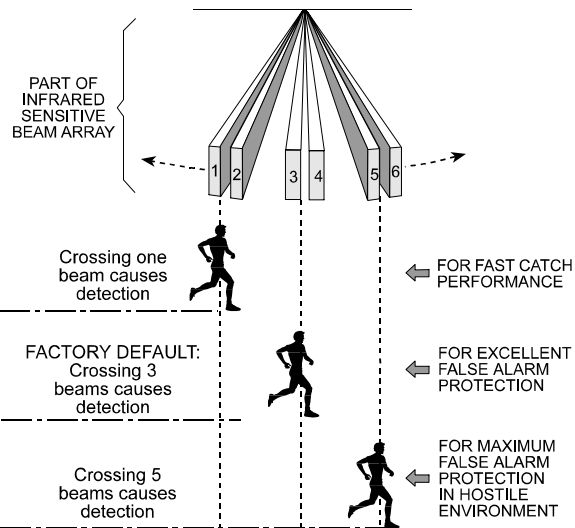


Figure 4. Setting the Pulse Counter

3.7 Walk Testing

The MCPIR-3000 is equipped with a LED/WALK TEST jumper which is set by default to ON. In this default position, the LED lights for 2 seconds upon transmission by the unit.

To save battery power in normal use, an automatic timer inhibits the detector for approximately 2 minutes after transmitter activation. The detector is automatically rearmed 2 minutes after detection of the last motion.

For effective walk testing, it is necessary to override the 2 minute timer by setting the LED/WALK-TEST jumper to the TEST position as shown here. →



Note: If the LED walk-test jumper is forgotten in TST position, the detector returns to ON position after approximately 30 minutes, to save battery power.

IMPORTANT! Once the cover is replaced, the detector goes through a stabilization period. The LED will flash once per 2 seconds until the detector has stabilized (stabilization time is at least 15 seconds).

A. Walk-test the entire protected area by walking slowly across the detector's field of view, observing the LED. Pause for 5 seconds after each test to allow the unit to complete its 3-transmission sequence (see Appendix A). The LED will light for 2 seconds.


B. Set the LED/WALK-TEST jumper to the ON position as shown here. →



Wait outside the coverage area. After five minutes, re-enter the coverage area and verify that the LED lights for 2 seconds upon detection.

C. If you continue moving, the unit will remain disabled due to the 2-minute battery saving timer. The unit will be rearmed provided that no motion is detected for approximately 2 minutes, and will then be ready to detect and transmit.

D. When done, set the LED/WALK-TEST jumper to the OFF position as shown here. →



This setting is recommended to prevent unauthorized people from tracing the detector's coverage pattern.

IMPORTANT! The range and the coverage area of the unit should be checked at least once a year. To assure proper continuous functioning, the end user should be instructed to perform a walk test at the far end of the coverage pattern prior to each time the alarm system is armed.

3.8 Swivel Brackets (optional)

The BR-1 is a swivel, surface-mount bracket which provides greater flexibility when setting the desired detection range. The BR-1 is adjustable 30° downward and 45° left or right (Fig. 5).

The BR-2 is a similar swivel bracket kit for room corners. The BR-3 is a similar swivel bracket kit for ceilings.

ATTENTION: With optional swivel brackets in use, the effective detection range may differ from that indicated in Table 1.

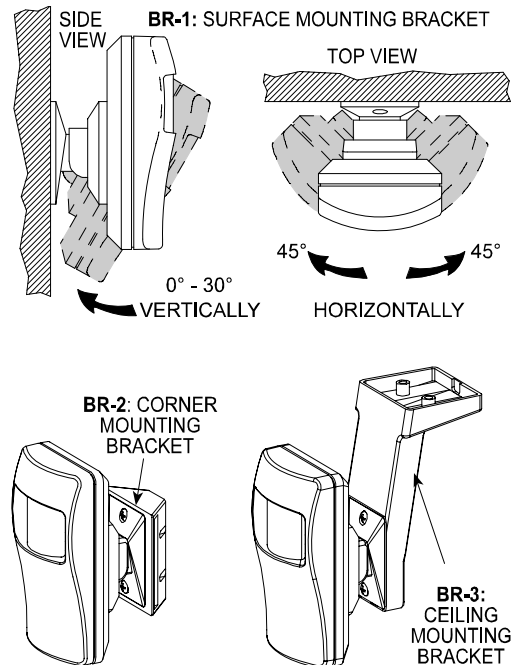


Figure 5. Optional Swivel Brackets

3.9 Tilt Switch (option)

The unit may be optionally equipped with a tilt switch, connected in series with the tamper switch. A two-position optional jumper will allow you to enable or disable the tilt switch (TILT ON or TILT OFF). If the tilt switch is enabled, tilting the unit or detaching it forcibly from its mounting place will generate a tamper alarm.

4. NOTES AND WARNINGS

4.1 Product Limitations

Visonic Ltd. wireless systems are reliable and are tested to high standards. However, due to the low transmitting power (required by the FCC and other regulating authorities), there are some limitations to be considered:

- A.** A receiver may be blocked by radio signals sent on or near its operating frequency, regardless of the digital code used.
- B.** A receiver responds to one transmitted signal at a time.
- C.** Wireless equipment should be tested regularly (at least once a week) to discover sources of interference and to protect against faults.

4.2 Compliance with Standards

This device complies with FCC Rules Part 15. Operation is subject to two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference that may be received or that may cause undesired operation.

WARNING! Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with the essential requirements and provisions of Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio and telecommunications terminal equipment.

4.3 Frequency Allocations for Wireless Devices in European (EU) Countries

- **433.92 MHz** has no restriction in any EU member state.
- **315 MHz** is not allowed in any EU member state
- **868.95 MHz (wide band)** is allowed in all EU member states.
- **869.2625 MHz (narrow band)** is not restricted in any EU member state.

WARRANTY

Visonic Ltd. and/or its subsidiaries and its affiliates ("the Manufacturer") warrants its products hereinafter referred to as "the Product" or "Products" to be in conformance with its own plans and specifications and to be free of defects in materials and workmanship under normal use and service for a period of twelve months from the date of shipment by the Manufacturer. The Manufacturer's obligations shall be limited within the warranty period, at its option, to repair or replace the product or any part thereof. The Manufacturer shall not be responsible for dismantling and/or reinstallation charges. To exercise the warranty the product must be returned to the Manufacturer freight prepaid and insured.

This warranty does not apply in the following cases: improper installation, misuse, failure to follow installation and operating instructions, alteration, abuse, accident or tampering, and repair by anyone other than the Manufacturer.

This warranty is exclusive and expressly in lieu of all other warranties, obligations or liabilities, whether written, oral, express or implied, including any warranty of merchantability or fitness for a particular purpose, or otherwise. In no case shall the Manufacturer be liable to anyone for any consequential or incidental damages for breach of this warranty or any other warranties whatsoever, as aforesaid.

This warranty shall not be modified, varied or extended, and the Manufacturer does not authorize any person to act on its behalf in the modification, variation or extension of this warranty. This warranty shall apply to the Product only. All products, accessories or attachments of others used in conjunction with the Product, including batteries, shall be covered solely by their own warranty, if any. The Manufacturer shall not be liable for any damage or loss whatsoever, whether directly, indirectly, incidentally, consequentially or otherwise, caused by the malfunction of the Product due to products, accessories, or attachments of others, including batteries, used in conjunction with the Products.

The Manufacturer does not represent that its Product may not be compromised and/or circumvented, or that the Product will prevent any death, personal and/or bodily injury and/or damage to property resulting from burglary, robbery, fire or otherwise, or that the Product will in all cases provide adequate warning or protection. User understands that a properly installed and maintained alarm may only reduce the risk of events such as burglary, robbery, and fire without warning, but it is not insurance or a guarantee that such will not occur or that there will be no death, personal damage and/or damage to property as a result.

The Manufacturer shall have no liability for any death, personal and/or bodily injury and/or damage to property or other loss whether direct, indirect, incidental, consequential or otherwise, based on a claim that the Product failed to function. However, if the Manufacturer is held liable, whether directly or indirectly, for any loss or damage arising under this limited warranty or otherwise, regardless of cause or origin, the Manufacturer's maximum liability shall not in any case exceed the purchase price of the Product, which shall be fixed as liquidated damages and not as a penalty, and shall be the complete and exclusive remedy against the Manufacturer.

Warning: The user should follow the installation and operation instructions and among other things test the Product and the whole system at least once a week. For various reasons, including, but not limited to, changes in environmental conditions, electric or electronic disruptions and tampering, the Product may not perform as expected. The user is advised to take all necessary precautions for his/her safety and the protection of his/her property.

6/91



W.E.E.E. Product Recycling Declaration

For information regarding the recycling of this product you must contact the company from which you originally purchased it. If you are discarding this product and not returning it for repair then you must ensure that it is returned as identified by your supplier. This product is not to be thrown away with everyday waste. Directive 2002/96/EC Waste Electrical and Electronic Equipment.



VISONIC LTD (ISRAEL): P.O.B 22020 TEL-AVIV 61220 ISRAEL. PHONE: (972-3) 645-6789, FAX: (972-3) 645-6788
VISONIC INC. (U.S.A.): 65 WEST DUDLEY TOWN ROAD, BLOOMFIELD CT. 06002-1376. PHONE: (860) 243-0833, (800) 223-0020 FAX: (860) 242-8094
VISONIC LTD. (UK): 7 COPPERHOUSE COURT, CALDECOTTE, MILTON KEYNES. MK7 8NL. TEL: (0870) 7300800 FAX: (0870) 7300801
INTERNET: www.visonic.com

©VISONIC LTD. 2005 MCPIR-3000 DE3630- (REV. 6 09/05)



MADE IN
ISRAEL

DE3630