

ENFORCER® SERIES ELECTRIC DEADBOLTS

SD-997A


For Fail-Secure Applications, 12VDC

SD-997B

For Fail-Safe Applications, 12VDC

SD-997B-24

For Fail-Safe Applications, 24VDC

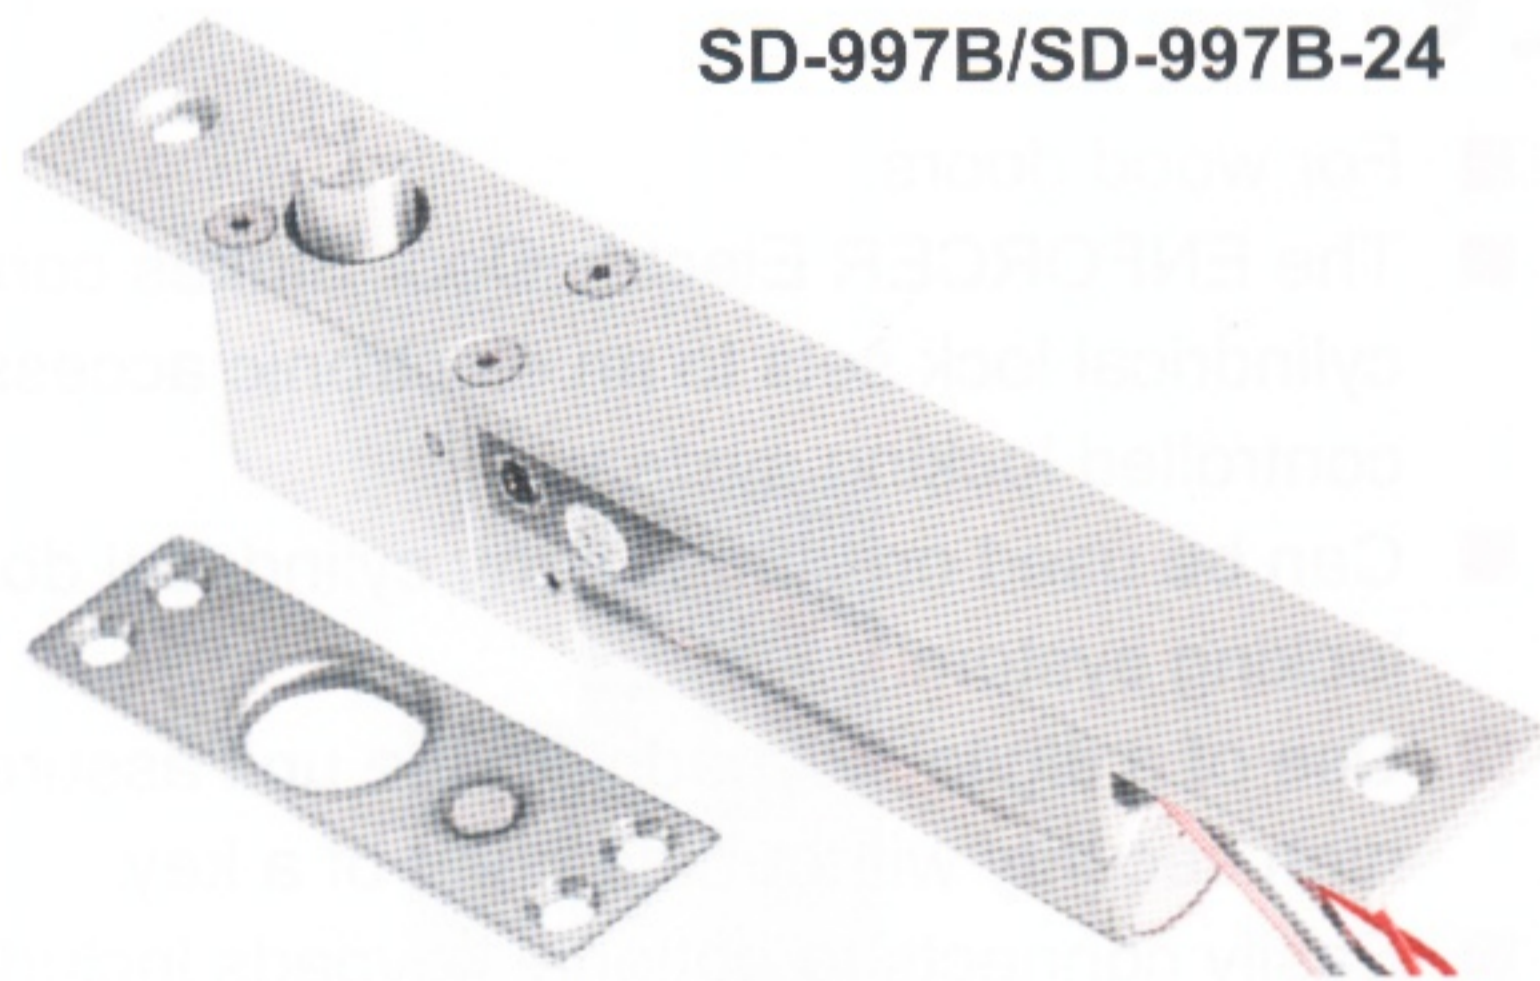

SD-997B/SD-997B-24



SD-997A

Lock knob

Incorporates manual lock/unlock cylinder to operate the SD-997A if power is lost (turn lock knob from inside protected premises and/or use key from outside protected premises).

- Adds concealed deadbolt security to most wood or hollow metal doors, with the added convenience of electrical operation.
- Stainless steel bolt, 5/8" diameter, 5/8" throw.
- Door open/close monitor (NO/C/NC).
- Adjustable door lock delay timer.
- Control wire allows release without cutting unit's power.
- Magnetic switch determines door position.
- Solenoid shuts off if door not closed properly.
- Easily connects to all SECO-LARM keypads.
- 1.5-Amp over-current protection.
- Powered by a solenoid.

SPECIFICATIONS:


	SD-997A	SD-997B	SD-997B-24
Operation	Fail-Secure	Fail-Safe	Fail-Safe
Current Draw	Standby: 320mA Activated: 880mA	Standby: 360mA Activated: 900mA	Standby: 170mA Activated: 420mA
Status Sensor	SPDT, 500mA @ 12VDC (N.O./C./N.C.)		SPDT, 250mA @ 24VDC (N.O./C./N.C.)
Operation Voltage	12VDC		24VDC
Adjustable Delay Timer	0, 3, 5, 9 secs.	0, 2.5, 5, 9 secs.	0, 2.5, 5, 9 sec.s
Weight (approx.)	2lbs., 5oz. (1kg)	1lb., 13oz. (0.82kg.)	1lb., 13oz. (0.82kg.)

SD-997SMB

Surface-Mount Bracket


SD-997UB

U-Bracket

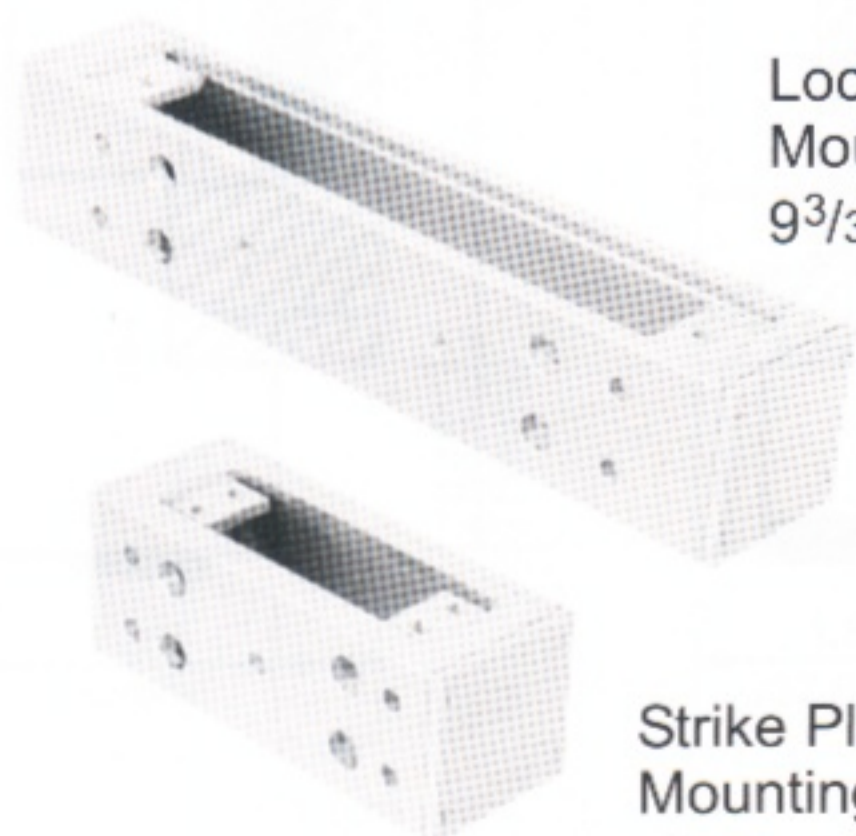

Lock Body
Mounting Bracket
9 3/32" x 1 13/16" x 1 3/4"

Strike Plate
Mounting Bracket
4 3/4" x 1 13/16" x 1 3/4"

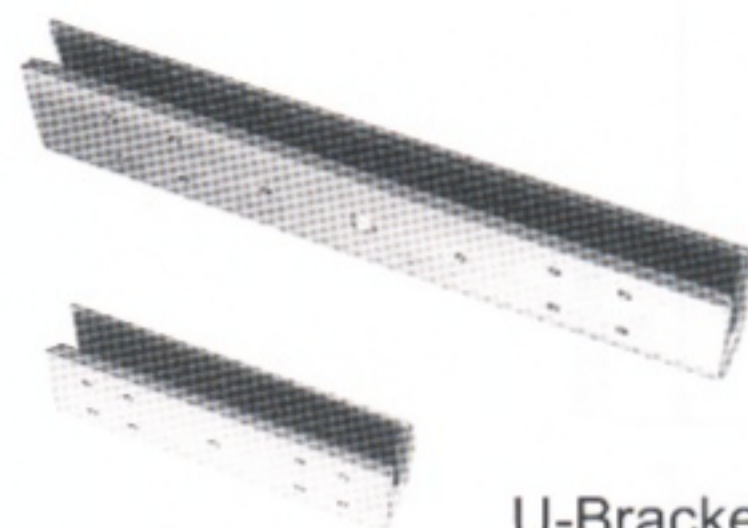

U-Brackets

- Use with SD-997B only.
- For surface mount on the door jamb.
- Two brackets included.
- Attractive brushed aluminum finish.
- Use U-Brackets for frameless glass door.

INSTALLATION:

